

# JBC

[www.jbctools.com](http://www.jbctools.com)



## Auto-Feed Iron

Ref. AL250-B



## Packing List

The following items should be included:

**Auto-feed Iron** ..... 1 unit  
Ref. AL250-B



**Allen Key 2,5mm** ..... 1 unit  
Ref. 0780493




**Manual** ..... 1 unit  
Ref. 0012317



# Features


The AL250-B Auto-feed Iron is compatible only with Auto-feed Soldering station.

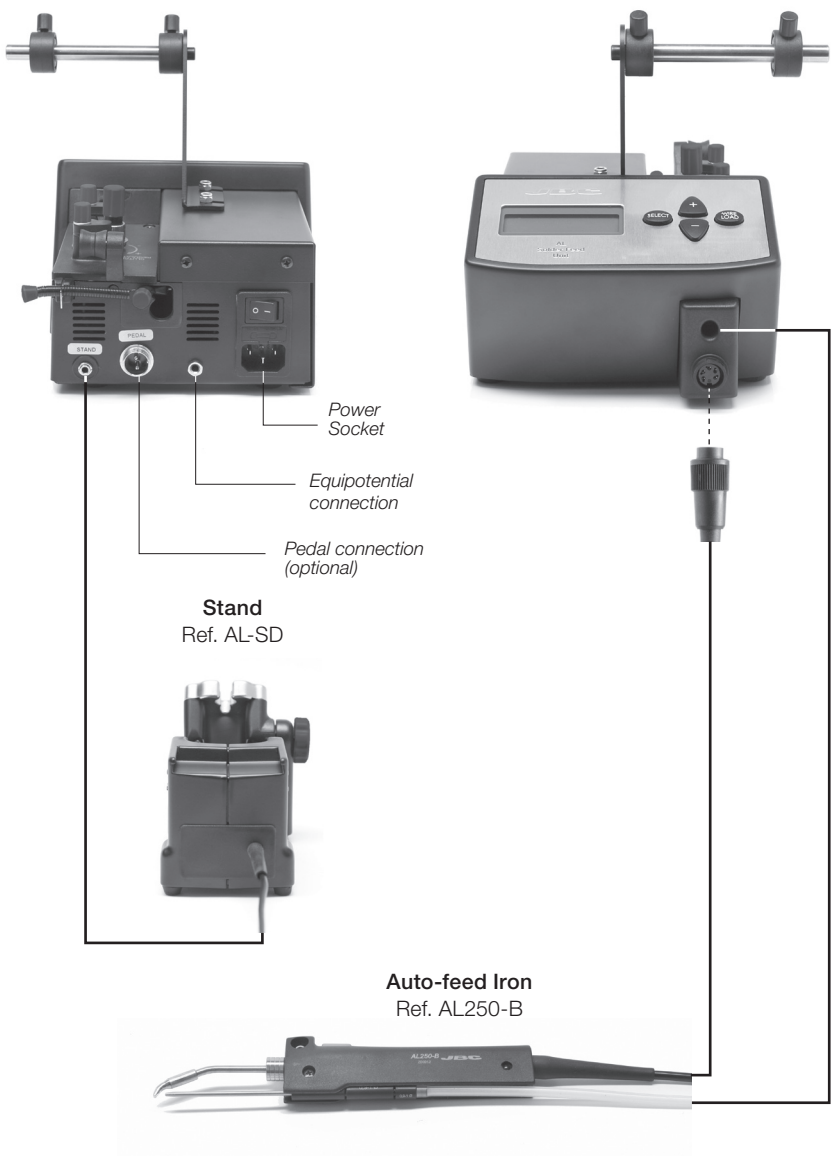

## Changing cartridge

For a safe cartridge change, unplug the tool or turn the station off before following these guidelines:

1. Loosen the cartridge screw to release it.  
Place the new cartridge in the Auto-feed iron.

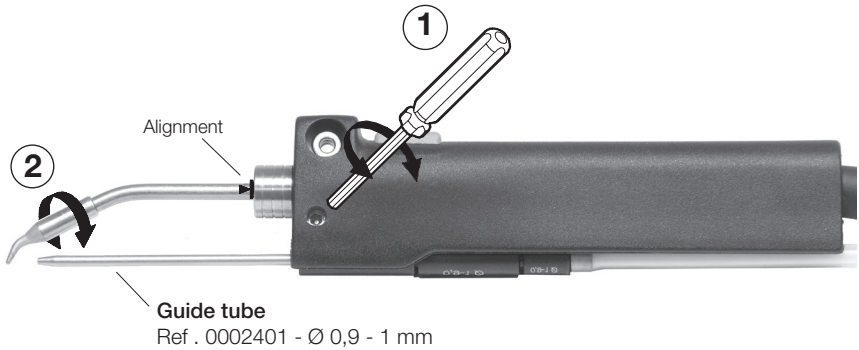


2. Align the tip of the cartridge with the solder Guide tube.

**Important:** It is essential to insert the cartridge till the end for a good connection. Use the mark as reference. Tighten the cartridge screw.

3. You must leave a gap of 8-10 mm between the tip and the end of the Guide tube.

4. Loosen the guide screw. Adjust the Guide tube and tighten the screw.

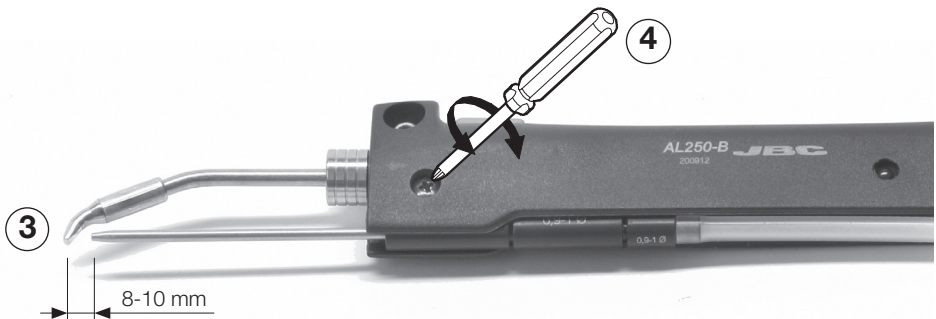

## Compatible Cartridges

The AL250-B Auto-feed Iron works with C250 cartridge range. Find the model that best suits your soldering needs in [www.jbctools.com](http://www.jbctools.com)



C250-420



C250-401



C250-402



C250-403




C250-409




C250-410



C250-404



C250-405



C250-406



C250-412



C250-418



C250-407



C250-408




C250-411



C250-413



C250-414



C250-415

Note: All the cartridges shown are actual size.

## Accessories

### Fume Extractor

Ref. F4468



### Support

Ref. AL-IA




### Optional Guide set

Ref. 0002399 - Ø 0,4 - 0,5 mm

0002402 - Ø 0,6 - 0,8 mm

0002843 - Ø 1,1 - 1,5 mm

0013915 - Ø 1,6 - 1,8 mm

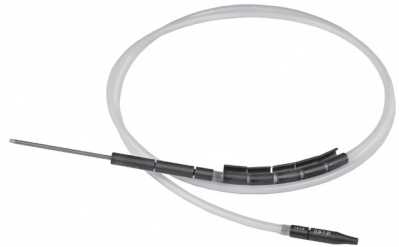

## Specifications

- Weight: 140 g (4.9 oz)
- Dimensions: 35 x 21 x 182 mm
- Diameter of solder wire: Ø 0,4 - 1,8 mm / 0.02 - 0.07 in

Complies with CE standards  
ESD protected housing "skin effect"

# JBC

### Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2002/96/EC, electronic equipment at the end of their life must be collected and returned to an authorized recycling facility.



Manual in other languages available on our website

**[www.jbctools.com](http://www.jbctools.com)**