

JBC

www.jbctools.com



Fume Extractor

Ref. FAE2-5A

Packing List

The following items should be included:

Fume Extractor 1 unit
Ref. FAE2-5A
Includes FAE2-100



RJ12 direct cable 2 units
Ref. 0019755



Cleaning stick 1 unit
Ref. 0004009



Power cable 1 unit
Ref. 0009417 (100V / 120V)
0009401 (230V)



Manual 1 unit
Ref. 0018826




Features




Assembly

For a basic working system you need:

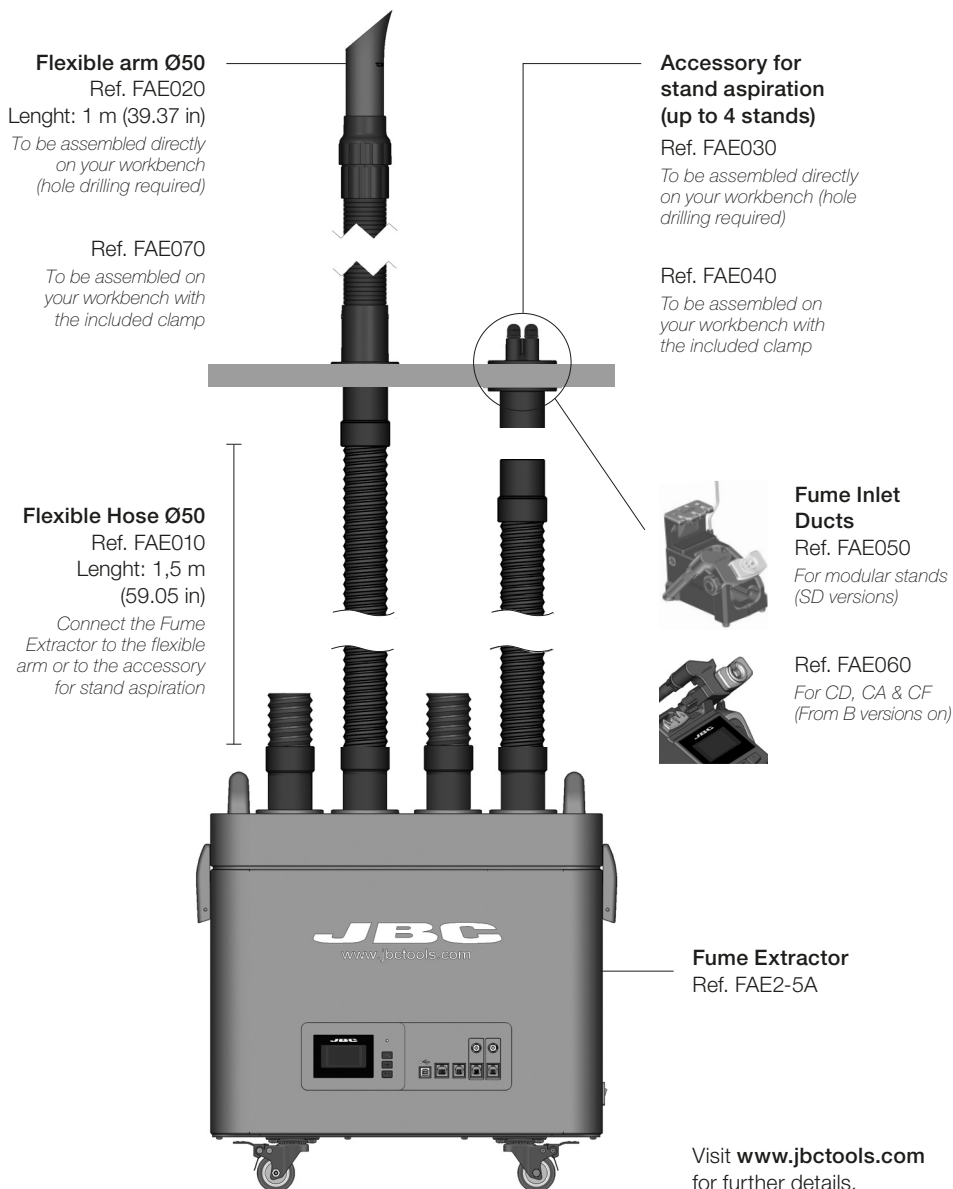


Connection with Excellence range

- Connectable to stations through the RJ12 ports.
- Each station controls a port.
- A stand inlet duct can be connected with **up to 4 tools** working independently.

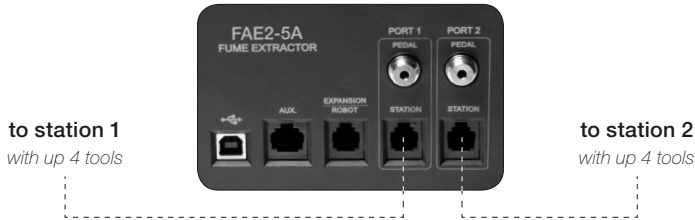


Connection with QSC-A *(soon available)*

- Connectable to stations with USB connector except JT-D, TE-D stations and their previous versions.
- More stations can be connected via a HUB-USB connector. This option allows any tool of any station connected to the QSC-A to activate the fume extractor.

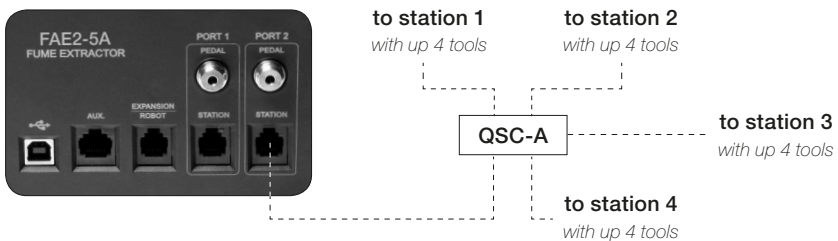


Connection with module FAE800

- Connectable via pedal port to CD, CA & CF stations without USB connector.
- The connection module controls the port of the station.

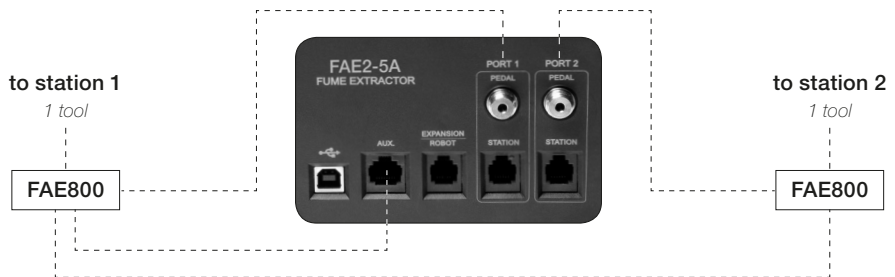

Connection with module FAE900

- Connectable via pedal port to DI, DD, DM & HD control units without USB connector.
- The connection module controls the port of the station.

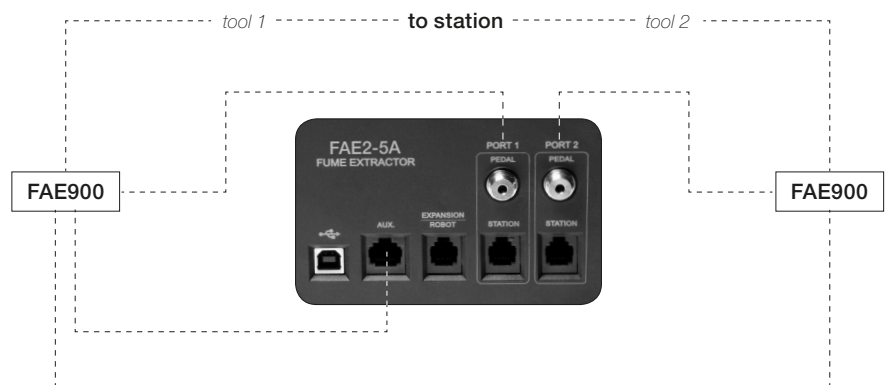

Working modes

Autonomous

Pedal

Activate the vacuum system with the pedal without being connected to a JBC station.

Continuous mode

The fume extractor works in continuous mode with the four valves opened.

Remote


Robot

Manage the fume extractor using a robotic system by means of the RJ12 connector.

Station


The valve in the working area opens when the tool is lifted from the stand. Once the tool is returned to the stand and enters sleep mode, the valve in the work area closes and the stand valve opens. After a period of inactivity on both ports, the unit stops.

Aspiration inlets control

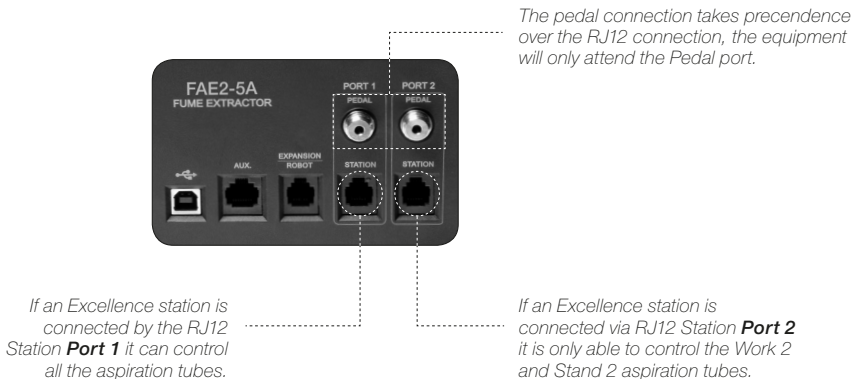


Control Process

Main Screen

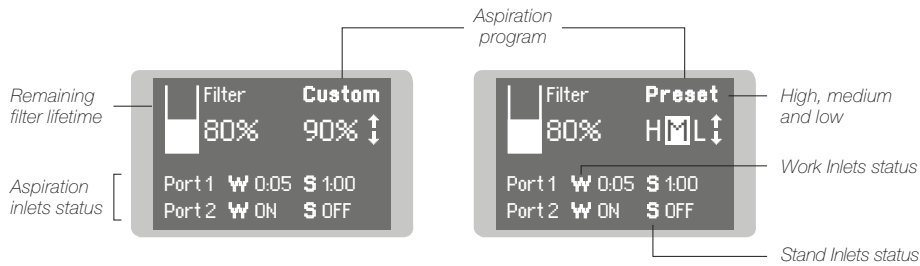

Main Menu

Original Pin: 0105

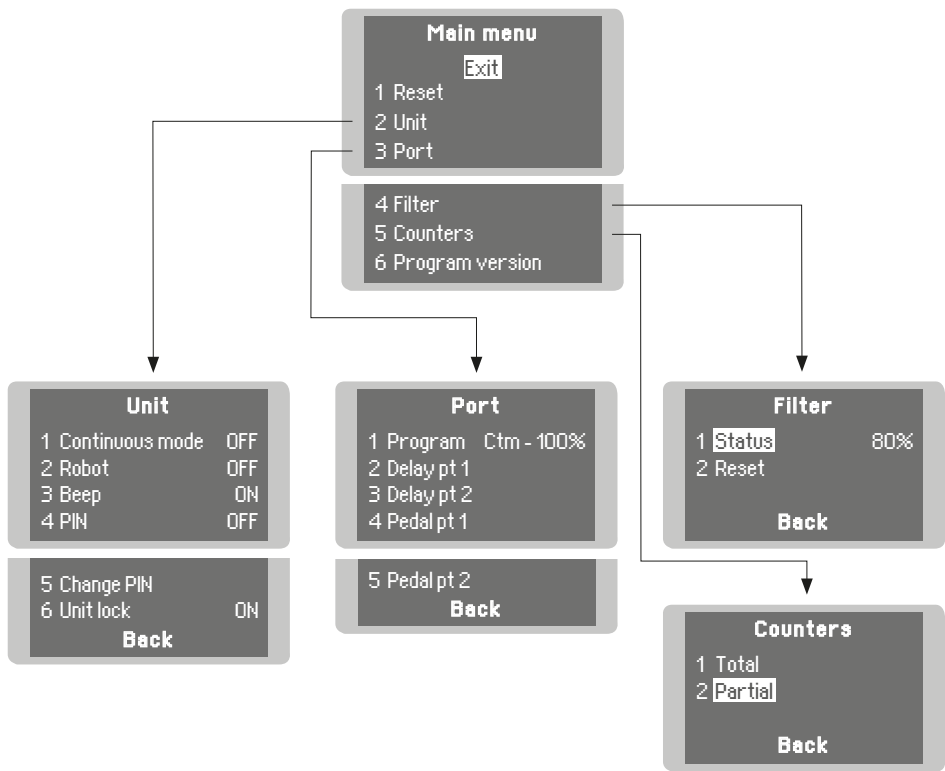

Control Process

Unit Screen

It opens all aspiration inlets with the selected program (high, medium, low or custom).

Unit	
1 Continuous mode	OFF
2 Robot	OFF
3 Beep	ON
4 PIN	OFF

5 Change PIN	
6 Unit lock	ON

Back

Enables station address to identify within a network with multiple devices.

Selects the communication transmission speed.

Selects the number of bits that the line remains without activity before sending a new data.

Robot	
1 Robot	OFF
2 Address	OFF
3 Address number	0
4 Speed	19200bps

5 Databits	8 bits
6 Stop bits	1bit
7 Parity	Odd

Back


Selects the station address for RS-485 communication (Range 0-99).

Size of protocol data bits. It is a non-modifiable parameter with 8 bits.

Selects the error control method.

Control Process


Port Screen

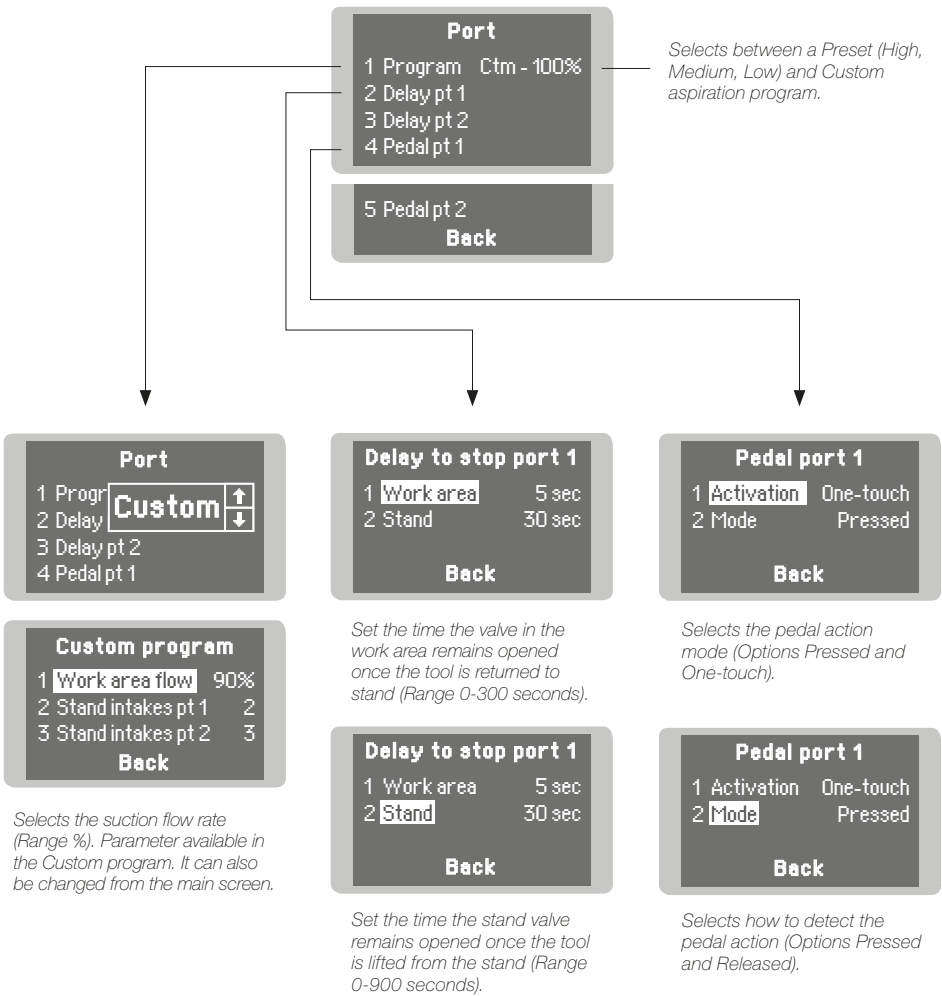

Maintenance

Filter replacement


- The unit notifies both through the display as the LED when filters need maintenance.
- To replace the filters, first turn the fume extractor off. Then remove the cover by opening the side closures of the casing.
- If once the pre-filter has been changed the saturation indicator is on, it means that the compact filter is already saturated and must be replaced too.

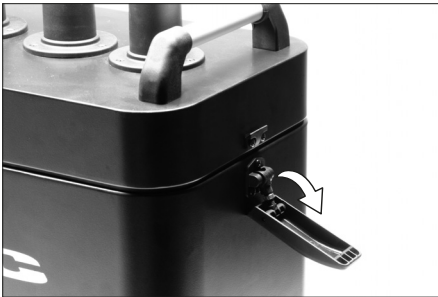


- The duration of the compact filter is 1 year maximum once its packaging is opened.
- Once the compact filter has been replaced, the filter counter must be reset.
(Main Menu > Filter > Reset)
- If the display shows an error message when the equipment is switched on, it is probable that the cover and casing connectors are dirty and making false contact between them. Remove the cover again and clean both connectors.



Pre filter
Ref. FAE2-110

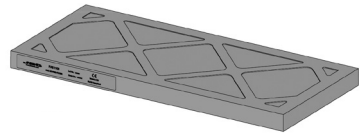

Compact filter + Pre filter
Ref. FAE2-100

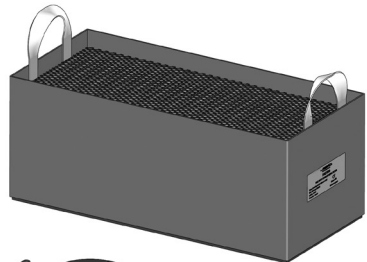

Maintenance


Valves

- Check the status of the valves when replacing the pre-filter or the compact filter.
- Use the cleaning stick if necessary and clean with alcohol to remove dirt residues.




Inlet valve
Ref. 0018831

*Clean the disc
and the gasket
on both sides*

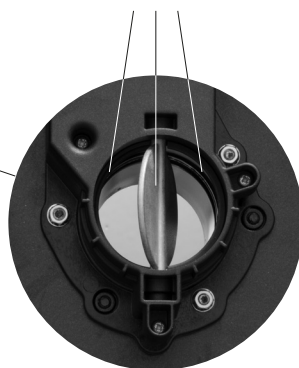

Latch Adjustment

- The locking force between casing and cover can be adjusted by turning the knurled nut of the locking mechanism.
- Turn clockwise to loosen and counterclockwise to tighten.

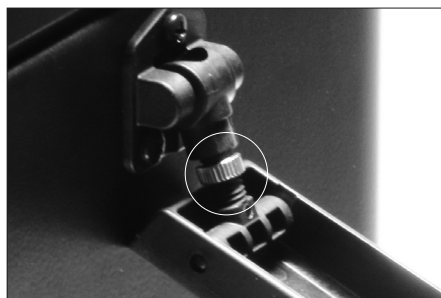

Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- The equipment is only designed to filtrate the fumes generated by soldering.
 - Do not use the units for the filtration of combustible, explosive or corrosive gases. Incorrect use may cause fire.
 - The power cord must be plugged into approved bases. Be sure that it is properly grounded before use. When unplugging it, hold the plug, not the wire.
 - Do not work on electrically live parts.
 - Do not leave the appliance unattended when it is on.
 - Do not cover the ventilation grills. Heat can cause inflammable products to ignite.
 - Avoid flux coming into contact with skin or eyes to prevent irritation.
 - This appliance can be used by children over the age of eight and also persons with reduced physical, sensory or mental capabilities or lack of experience provided that they have been given adequate supervision or instruction concerning use of the appliance and understand the hazards involved. Children must not play with the appliance.
 - Maintenance must not be carried out by children unless supervised.
 - Keep your workplace clean and tidy. Wear appropriate protective mask, glasses and gloves when handling dirt filter or pre-filter.
 - Saturated filters can not be cleaned and reused.
 - Treat the saturated filters as waste depending on the filtered contaminant and the applicable standards in each country.
- European Waste Catalog classification:
- 15 02: Absorbents, filter materials, wiping cloths and protective clothing.
 - 15 02 02*: Absorbents, filter materials (including oil filters not otherwise specified, wiping cloths, protective clothing contaminated by dangerous substances.
 - 15 02 03: Absorbents, filter materials, wiping cloths and protective clothing other than those mentioned in 15 02 02.
- In case of not complying with the filter change recommendations, the maximum particle and gas concentrations established in each country could be exceeded.

Exploded View

F AE2-5A 100/120/230V
FAE2-5A FUME EXTRACTOR




F AE2-5A

0019751 (x2)

SPARE PARTS**FAE2-5A:**

-CIRCUIT:	0018939
-INLET VALVE:	0018831
-H13 + CARBON + M5 FILTER:	FAE2-100
-M5 PRE-FILTER:	FAE2-110

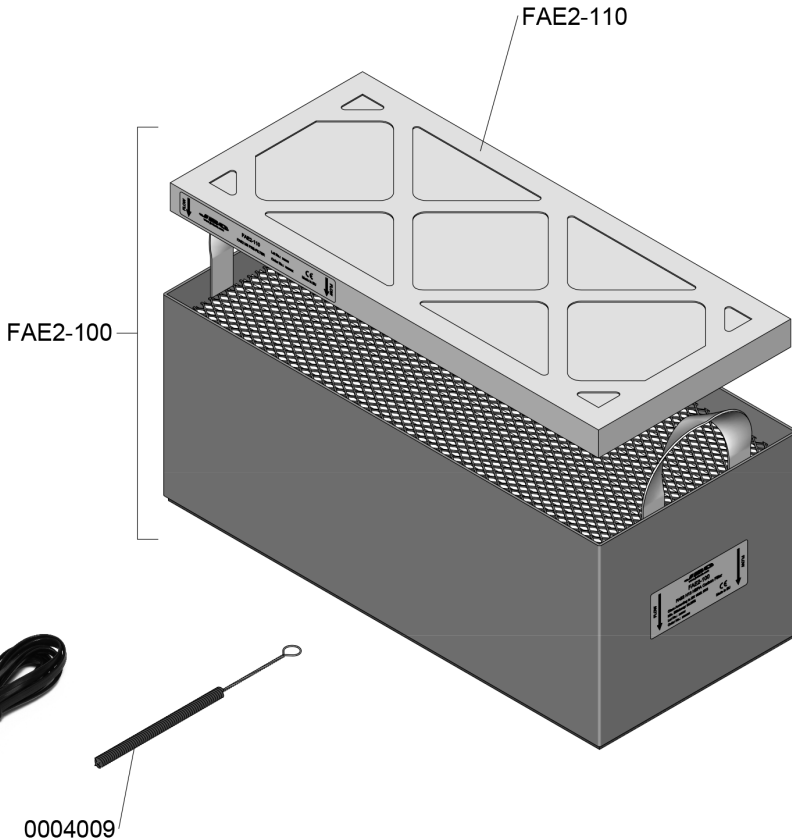FAE2-5A 100/120/230V FUSE T-8A

Specifications

FAE2-5A 120V 50/60Hz. Input power: 500W

FAE2-5A 230V 50/60Hz. Input power: 500W

FAE2-5A 100V 50/60Hz. Input power: 320W

- Weight: 33,6 kg (74.08 lb)
- Dimensions: 558 x 292 x 562 mm (21.97 x 11.50 x 22.13 in)
- Fuse: 8 AT
- Blower type: Brushless
- Max. flow rate: 290 m³/h (10241.25 f³/h)
- Max. vacuum: 6,1 KPa (0.88 psi)
- Work areas: 2
- Noise: 54 dB
- Pre-filter: Medium dust filter M5 (EN 779)
- Compact Filters: H3 particle filter (EN 1822)
Activated carbon filter

Complies with CE standards.

ESD protected.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2002/96/EC, electronic equipment at the end of their life must be collected and returned to an authorized recycling facility.



Manual in other languages available on our website

www.jbctools.com