HIOS®

innovative technology
for Turning The World

CL-6500



Lever type
CL-6500

Push type
CL-6500PS

Suction(Vacuum)	Anti-electrostatic	Clean Room + Anti-electrostatic	Noiseless Screwdriver
CLQ-6500	CL-6500ESD	CLQ-6500CR-ESD	CL-6500NL
			

About variation

Feature

Well suited for many kinds of operations requiring a wide range of torque values

This screwdriver has been a long-selling product thanks to its operability, reliability and stability.

With low DC voltage these screwdrivers can be used safely.

The grip design helps opertors to reduce fatigue caused by long hours operation.

CL-6500

Specification

Download


Operation Manual (pdf)


DXF (dxf)

Start		
Output Torque Range	N・m	
	lbf・in	
	kgf・cm	
Torque Switching		
Unloaded Rotation Speed(r.p.m)	Low	
	High	
Screw Size(mm)	Screw size	
	Tapping	
Bit (selectable)※	Hios shank	
	Hex shank	
External Dimensions(mm)	Grip	
	Length(mm)	
Accessories	Bit	H5
		1/4HEX
	Spring	
	Cord length(m)	
Carbon brush order code		
Torpue Range Table		

Lever Start Type
0.3-1.6

2.6-14
3-16
Stepless Adjustment
600
900
2-4
2-3
H5
1/4HEX or 5HEX
37
235
+#1(φ5.0×60mm) +#2(φ5.0×60mm)
+♯1 (5.0×50mm) +♯2 (5.0×50mm) - (5.0×50mm)
White
2m(5p)
CL65-0490(1pair)

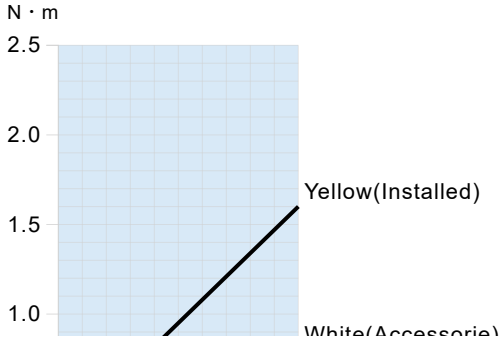

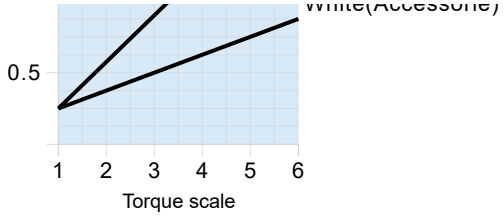



Series Comparison


Model

Start		
Output Torque Range	N・m	
	lbf・in	
	kgf・cm	
Unloaded Rotation Speed(r.p.m)	Low	
	High	
	Unloaded Rotation Speed(r.p.m)	
Screw Size(mm)	Screw size	
	Tapping	
Bit Drive	Hios shank	
	Hex shank	
Output Torque Range	kgf･cm	
	0	
	1	
	5	
	10	
	20	
	50	
	100	

CL-2000	CL-3000	CL-4000
		
Lever Start Type	Lever Start Type	Lever Start Type
0.02-0.2	0.03-0.2	0.1-0.55
0.17-1.7	0.3-1.7	0.9-4.8
0.2-2	0.2-2	1-5.5
490	670	690
680	1000	1000
–	–	–
1-2.3	1-2	1.4-2.6
1-2	1-1.7	1.4-2.3
H4	H4	H4
–	–	1/4HEX or 5HEX







Related Accessories

Vertical Screwdriver Operating Stand VMS-40

Vertical Screwdriver Operating Stand VMS-50

for BLG /BL/CL/SS/α /VZ(VZ-1510)Series



for PG / BLG / BL / CL / SS / α / VZseries



Angle Attachment

for CL /α series
(HIOS H5 and 5HEX drive)



Angle Attachment ANGLX-Z

for CL /α series
(1/4 HEX drive)



Push-to-Start Grip Attachment PS-1

for CL /SS /α series

Push-to-Start Grip Attachment PS-1-ESD

for CL/ SS/ α series





Recommended Screw

HIOS PAT. Screw recess

HIOS own high-performance screws to improve the conventional problems.

Related Items

MC-70L (for multiple screwdriver)

DC Type

For CL/SS/α series
For DC screwdrivers Power Supply

CLT-70STC3 (power supply type)

STC3 Series (DC Type)

Screw counter





CLOP-SC1

SC1 Series (DC Type)

Separate counter



© 2021 HIOS Inc. ALL RIGHT RESERVED.