




[www.jbctools.com](http://www.jbctools.com)

English

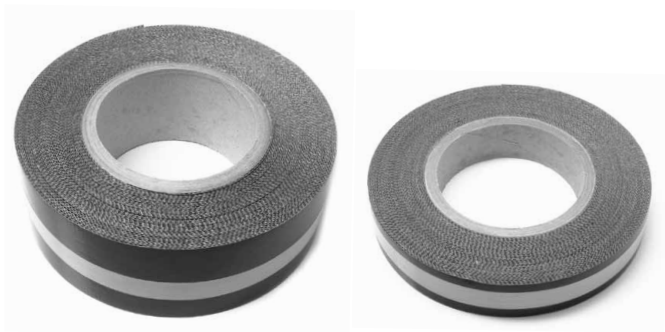

# Thermally Conductive Tapes

Ref. PH222 / PH223


## Packing List

The following items should be included:


|  |                     |
|--|---------------------|
| <b>Thermally<br/>Conductive Tape</b> ..... | <b>Manual</b> ..... |
| 1 unit                                     | 1 unit              |
| See the reference below.                   | Ref. 0014928        |

## Features

**Thermally Conductive Tape**  
Ref. PH222



**Thermally Conductive Tape**  
Ref. PH223



Resistant and reusable tapes. Does not deform after use.  
Supplied in reels for easy cutting.

## How to use

High emissivity tape provides a 10x faster and more uniform preheating of PCBs with metal substrates due to greater absorption of infrared.

1. Cut the tape to size and fix onto the underside of the PCB.  
JBC recommends covering the whole underside. Partial covering may cause deformity or damage to the PCB due to an unequal heating.



2. Place the PCB with the tape on the PCB Holder. After use it can be easily removed without leaving any residue. It can also be reused.



# Specifications

- Weight: PH222 - 440 g (1 lb)  
PH223 - 262 g (0.5 lb)
- Width: PH222 - 50 mm  
PH223 - 25 mm
- Reel length: 15 m
- Maximum operating temperature: 250°C (482°F)

Comply with CE standards

## JBC

---

### Warranty

JBC's 2 year warranty covers this device against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.

---



This product should not be thrown in the garbage. In accordance with the European directive 2002/96/EC, electronic equipment at the end of their life must be collected and returned to an authorized recycling facility.