

JBC

The Soldering Co.



Tip Cleaning Systems

Invest your time in soldering, not cleaning

Cleaning Systems

For good thermal transfer, keep the tip tinned thus free from oxides.


JBC offers effective, practical and affordable methods to prevent splashing and extend tip life:

Clean the tip in less than a second



With automatic cleaners you **save time** and **optimize production**.

Improve heat transfer

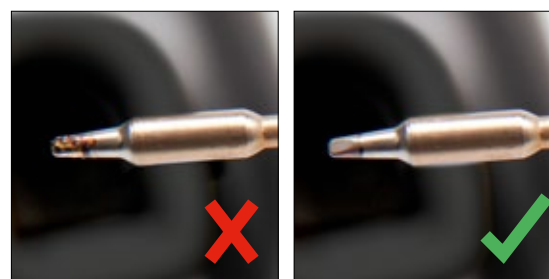

A clean tip is always easier to tin, resulting in **higher quality solder joints**.

Easy to empty



The solder collector tray can be **easily emptied** and **re-used** with no wear and tear.

Keep your work area clean



The locking mechanism on the brushes makes them **fast and easy to replace**.

CLU Senior Tip Cleaner

This cleaner is excellent for cleaning tips with different shapes and sizes. You can easily switch between sensor and continuous mode by pressing the top buttons.

Brushes for CLU



Ref. **CLU8**
Metal Brushes



Ref. **CLU7**
Metal Brushes



Ref. **CLUP1**
Non-Metal Brushes



Ref. **CLUP7**
Non-Metal Brushes



Ref. **CLUP2**
High Melting Point
Non-Metal Brushes



Ref. **CLUP8**
High Melting Point
Non-Metal Brushes

Continuous Mode Turn On/Off Sensor Mode



It also features a second position which facilitates vertical tip access



CLM Manual Tip Cleaner

A complete cleaning system with splashguard and antisplash membrane to keep the work area clean and free of solder particles.

Antisplash rubber

Ref. **CL7882**

Prevent splashing of solder particles and maintain the work area clean.

Brass Wool

Ref. **CL6210**

Very effective cleaning method. It leaves a small layer of solder on the tip to prevent oxidation between cleaning and rewetting.



Non-slip Base

No need to hold the base while cleaning tips.

ESD-safe Tip Wiper

Ref. **CL8010**

A temperature-resistant receptacle lets the operator remove excess solder by gently tapping or wiping.

Sponge

Ref. **S0354**

The least harmful cleaning method. Keep the sponge moist with distilled water when working to avoid tip wear.



Specifications

	CLU	CLM
Dimensions	128 x 131 x 137 mm / 5.03 x 5.15 x 5.39 in	112 x 89 x 90 mm / 4.41 x 3.5 x 3.54 in
Weight	2.1 Kg / 4.63 lb	0.88 Kg / 1.93 lb
AC Adapter	Input: 100 - 240V, 50/60Hz Output: DC 24V, 2 A	--
Brush diameter	50 mm / 1.97 in	--
Brush speed	750 rpm	--
Vertical position	✓	--

