



### // FEATURES

- Blowdown station for coolant and swarf
- Used for cleaning of parts after machining.
- Compressed air powered.
- Complies with HSG258

### // CONSTRUCTION

- All steel body, fully welded
- Powder coated
- Perspex screen for operator protection.
- Removable swarf bin with 2-stage filter.
- Colour scheme to match your machine tool if required.

### // APPLICATIONS

Removal of coolant and swarf from machined parts.



MIST  
EXTRACTION

## FEATURES



### // THE BLOWDOWN STATION FOR COOLANT AND SWARF

BD500 and BD1000 are designed to stop operators blowing coolant and swarf into your workspace.



### // COMPACT SELF-CONTAINED STATION

BD runs completely from compressed air, so requires no electrical power.



### // AIRGUN ATTACHMENT

Airgun for operator use to dislodge swarf and coolant

### // FOOT PEDAL OPERATION


Foot pedal operates venturi and allows airgun to function on demand.



### // REMOVABLE SWARF BIN

Swarf bin is easily removed and emptied; the bin contains a 2-stage filter system to capture most particulates before returning air to the workspace.

## DIMENSIONS

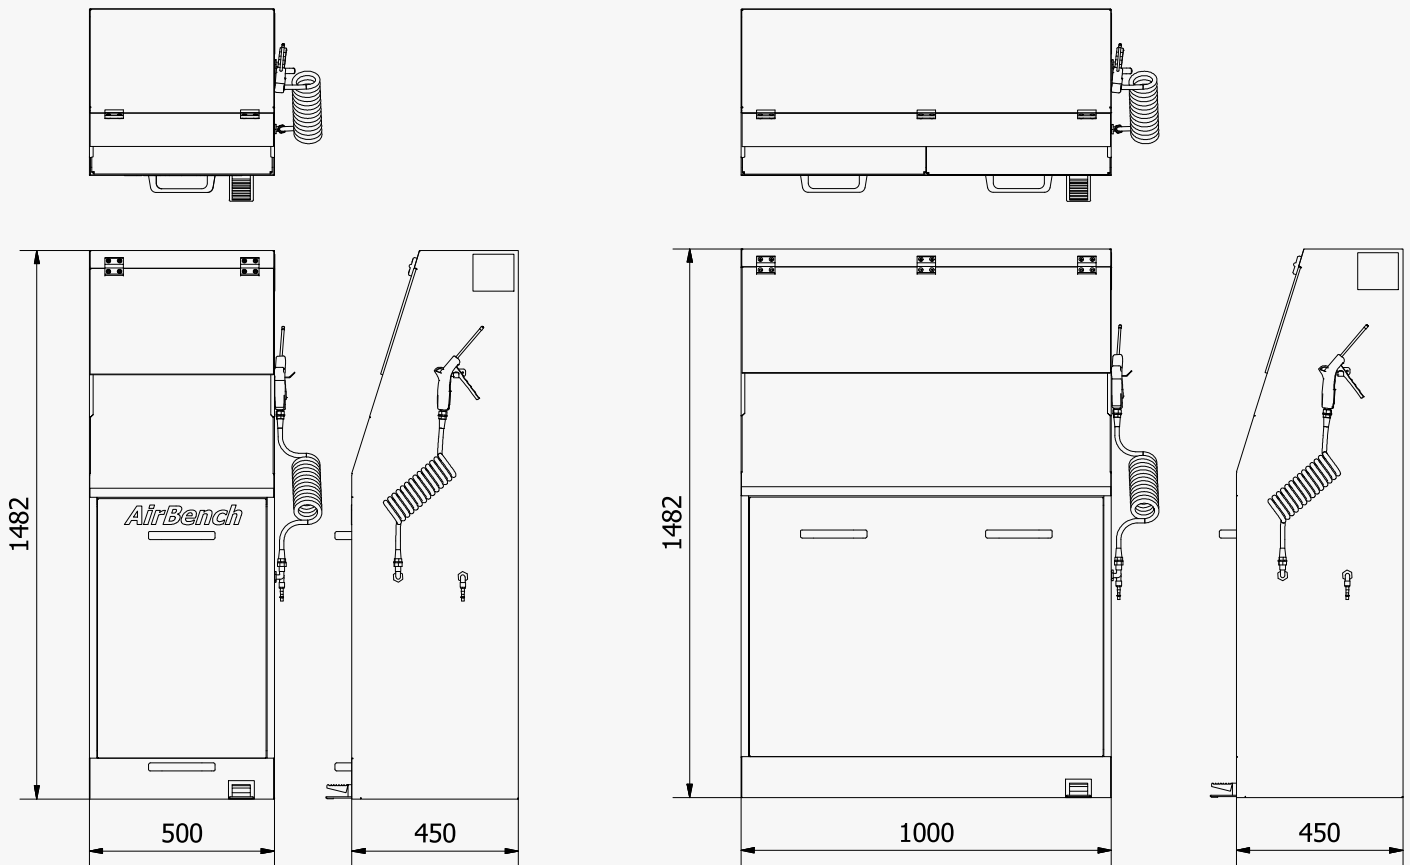

## // TECHNICAL DATA

MODEL	WIDTH A	OVERALL DEPTH B	HEIGHT C
BD500	500	450	1482
BD1000	1000	450	1482

## // GENERAL

<b>POWER SUPPLY</b>	Compressed air only	<b>AIR INLET</b>	Series 19
<b>NOISE LEVEL</b>	<70dBA at 1m	<b>FINISH (STD)</b>	RAL7035 as standard