



# Installation and Operation - OMF2500

Issue Date: 19th November 2019

---

<b>Cautions</b>	<b>3</b>
DIRECTIONS FOR USE	3
<b>Prior To use</b>	<b>4</b>
PREPARATION	4
INSTALLATION	4
ELECTRICAL CONNECTIONS	4
COMMISSIONING	4
<b>Operation</b>	<b>5</b>
PRINCIPLE OF OPERATION	5
CONTROLS	5
FILTER REPLACEMENT	5
FILTER ACCESS	6
PARTS LIST	7
FAULT FINDING	8
WIRING DIAGRAM - OMF - 415V	9
WIRING DIAGRAM - TRANSFER TANK	10
COMMISSIONING	11
SUPPORT	11
MAINTENANCE RECORD / LOGBOOK	12
<b>DECLARATION OF CONFORMITY</b>	<b>13</b>

---

## CAUTIONS

### Directions for Use

The OMF2500 is built to CE standards (1995) and conforms to HSG258 (controlling airborne contaminants at work). As such, it must be operated in strict accordance with this manual.

The OMF2500 is designed for indoor installation only and must be protected from excessive moisture. Always make sure that good access is provided for the maintenance of the OMF2500.

**WARNING! Risk of personal injury, fire or explosion.**

- The OMF2500 must not be used in an environment where there is a risk of explosion from dust or gases in explosive concentrations
- The OMF2500 must not be used for extracting toxic substances
- The OMF2500 must not be used without filters
- Always isolate the mains power before changing filters or removing any components from the OMF2500

---

## PRIOR TO USE

### PREPARATION

Immediately upon receiving the OMF2500, examine the packaging for any damage that may have occurred during shipment. In the event of any damage please contact the supplier immediately.

### INSTALLATION

The unit must be installed on a suitable level floor that is able to support its weight. Before installation, check that adequate space is available for replacement of filters. See detailed assembly instructions later in this manual for units shipped as modules.

### ELECTRICAL CONNECTIONS

The unit is pre-wired and fully tested for operator safety. Unscrew 2 retaining screws at the right hand side of the control panel and open. The electrical connections will be found on the electrical panel. The cable entry is located on the left hand side.

Where fitted, cable entry for ancillaries such as a transfer tank is to the left hand side, towards the rear of the unit; with cable run through two cable glands into the control enclosure.

Take care not to pinch the flexible tubes, or electrical cables.

Switch on unit to check the electrical installation/ fan rotation. Incorrect fan rotation will result in poor performance.

### COMMISSIONING

The unit should undergo commissioning testing by the installer. A commissioning certificate is provided at the rear of this manual.

---

# OPERATION

## PRINCIPLE OF OPERATION

The OMF2500 is supplied with:

- Mesh Demister or Stage 1 Pre Filter
- Stage 2 Pre Filter
- HEPA filter H10
- Centrifugal fan assembly

Air is drawn through the three filters in an upward direction, and the clean air expelled at the rear. The condensate will collect in the base where it is discharged through the drain provided.

## CONTROLS

All electrical equipment and controls are located in the electrical enclosure.

1) MAINS ISOLATOR	Power on/off
2) FILTER GAUGES	Indicates filter condition with 'filter full 'indicator
3) RED LIGHT	Advises motor overload
4) WHITE LIGHT	Power on

## FILTER REPLACEMENT

When filter 1, 2, or 3 (mesh demister or Stage 1 prefilter, Stage 2 prefilter) are full they can be cleaned. For the best results apply a degreaser to the dirty face and allow to absorb. Rinse, applying the process to the top of the filter to allow the dirt to be washed out downwards. Allow to drain until dry. The HEPA Filter cannot be cleaned and must be replaced when full.

## FILTER ACCESS


The pressure gauge will indicate the initial (clean) pressure of the system.

Note this initial reading when the filter is commissioned. (see 'commissioning 'within this manual).

To gain access to the filter, release the door latches and open the door.

Lower levers (A) into the horizontal position.

The filters can now be withdrawn.

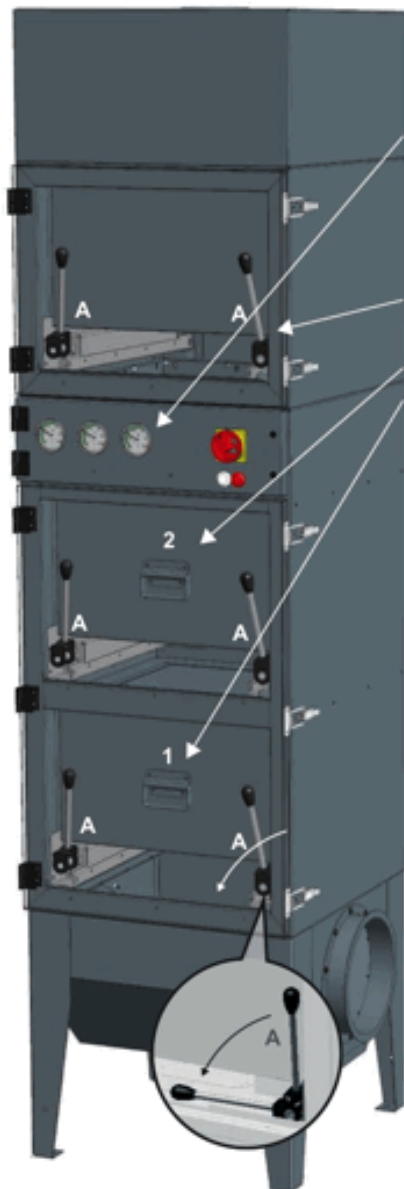

The pressure gauge will indicate the initial (clean) pressure of the system.

Note this initial reading when the filter is commissioned. (see 'commissioning 'within this manual).

To gain access to the filter, release the door latches and open the door.

Lower levers (A) into the horizontal position.

The filters (1), (2) and (3) can now be withdrawn.

To refit the filters, place in the runners with seal uppermost and push fully home.

Then raise both levers (A) into the vertical position, and the filter(s) will be locked into place. Close the door.

### **WARNING! Risk of personal injury.**

- Always isolate the mains power before changing filters or removing any components from the OMF2500.

- Use necessary PPE

**NOTE: Filters 1 and 2 weigh 15kg dry. However, when wet they will be considerably heavier.**

Parts list schematic

---

## PARTS LIST

Description	Part Number	Qty
<b>Mesh Demister Stage 1 (if fitted)</b>	420003	1
<b>Prefilter Stage 1 and 2</b>	450030	1
<b>Filter 3 (HEPA Filter)</b>	450034	1
<b>Fan RH35</b>	301027	1

## FAULT FINDING

Fault	Remedy
Lack of Suction	Dirty filters (see page 4)
Motor does not operate	Motor tripped - reset trip in elec panel Faulty motor (motor needs replacement)
Fan discharge air is contaminated	The filtration system is being by-passed. Check for damage or incorrectly fitted filter(s), and replace as appropriate.


### **WARNING! Risk of personal injury.**

- Always isolate the mains power before changing filters or removing any components from the OMF2500.
- Use necessary PPE

**NOTE:** Filters 1 and 2 weigh 15kg dry. However, when wet they will be considerably heavier.




Wiring Diagram - OMF - 415v

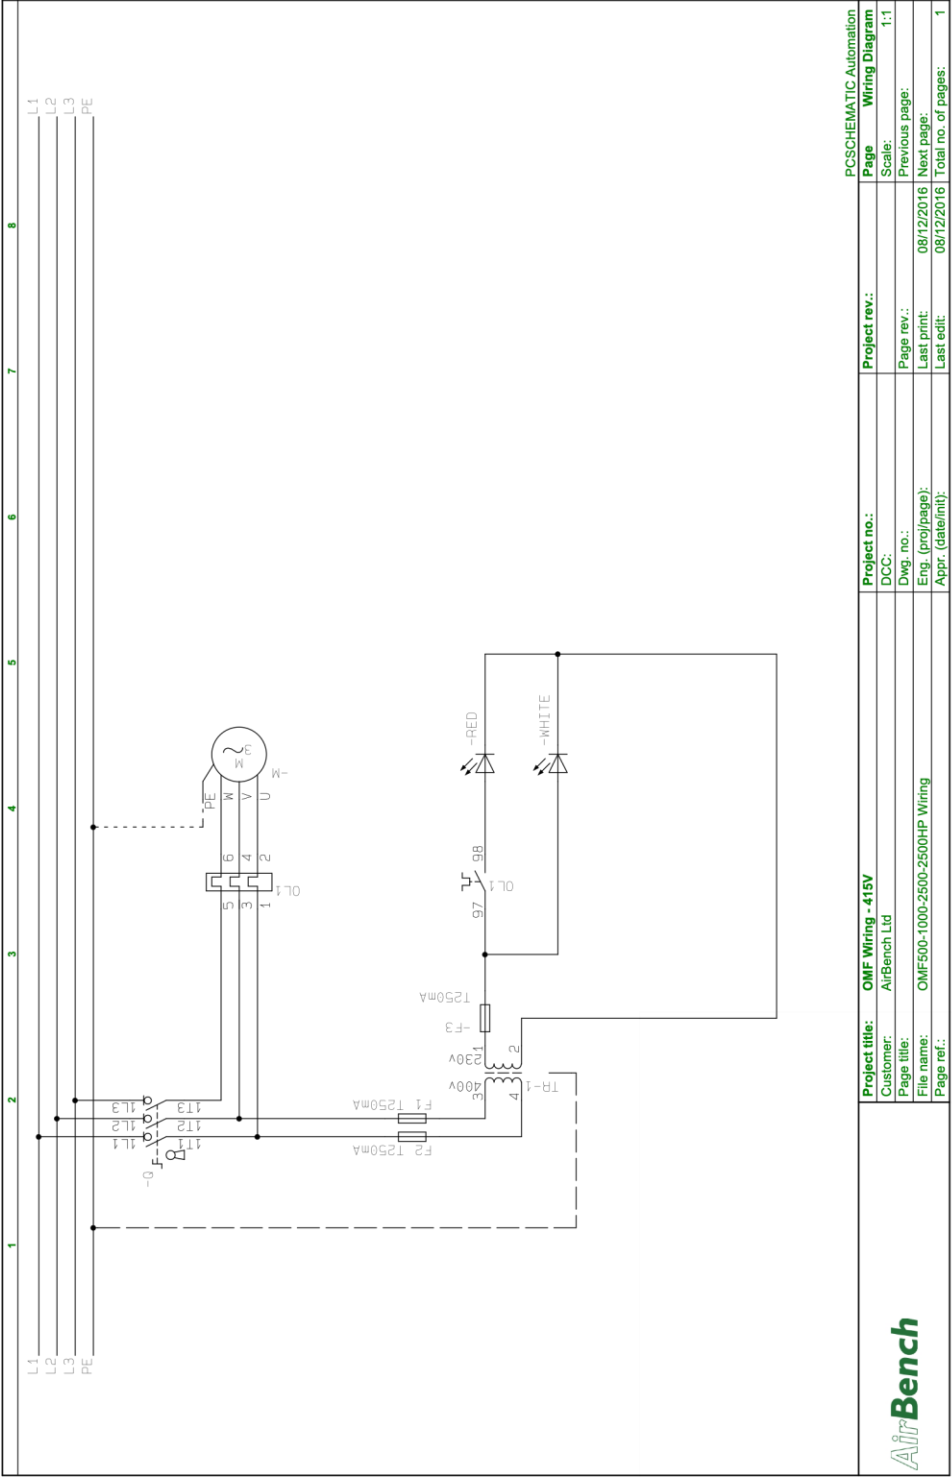

AirBench

Wiring Diagram - Transfer Tank

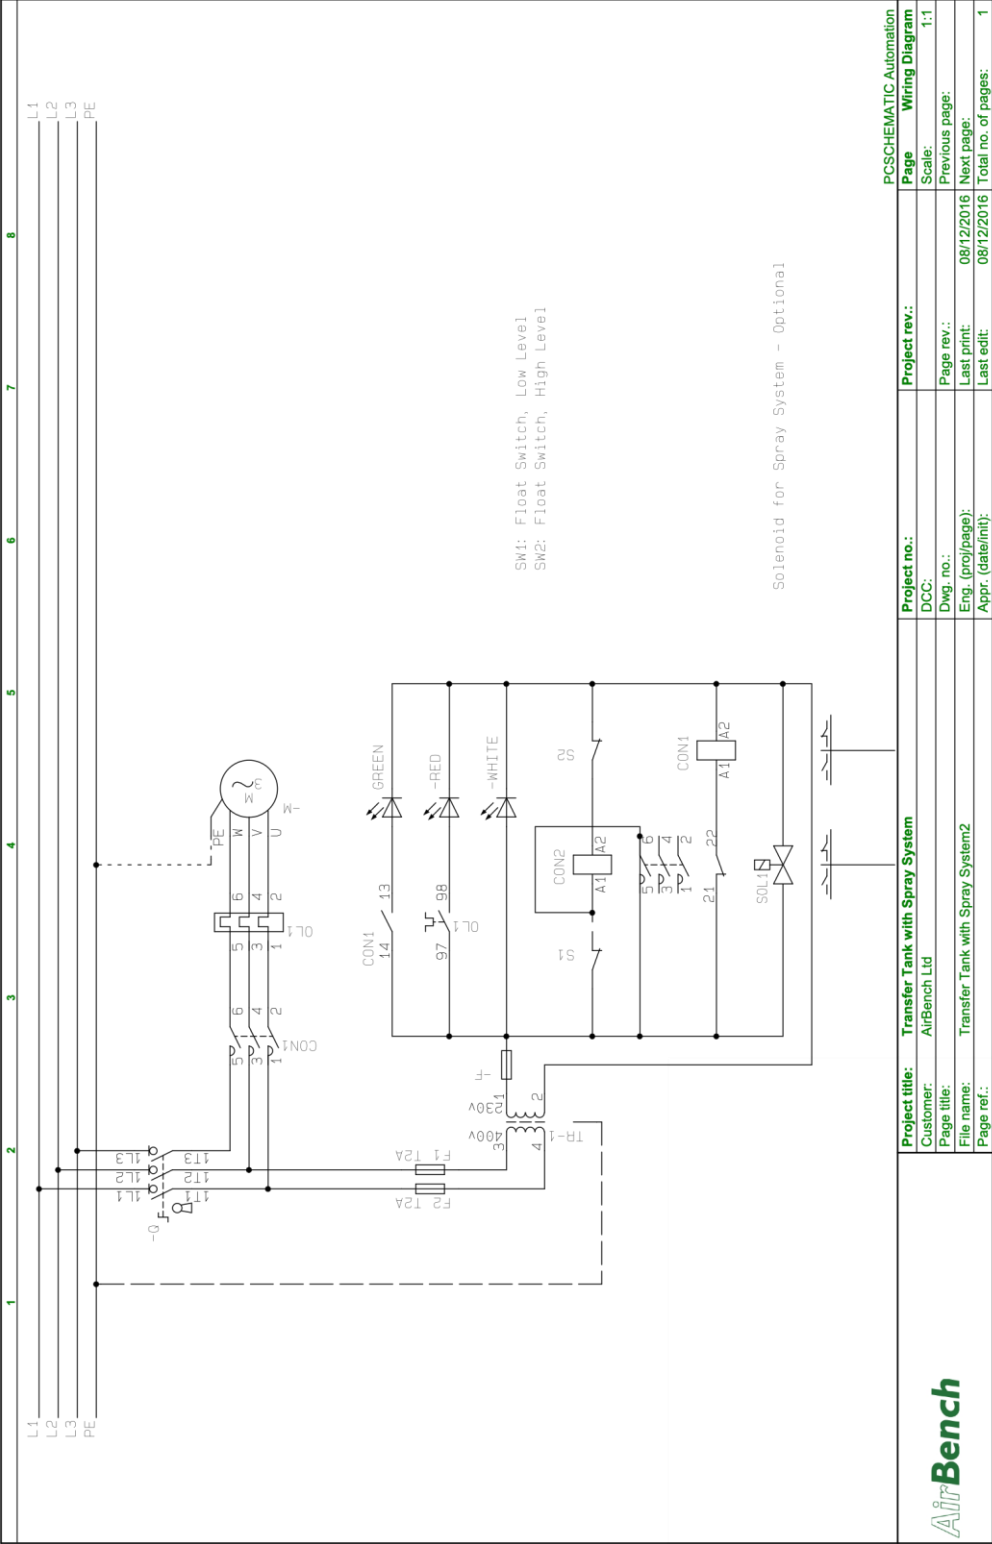

---

## COMMISSIONING

Complete the following information following installation:

Serial Number: \_\_\_\_\_

Installlation Date: \_\_\_\_\_

Installer Name: \_\_\_\_\_

Duct Velocity: \_\_\_\_\_

Filter 1 gauge reading: \_\_\_\_\_

Filter 2 gauge reading: \_\_\_\_\_

Filter 3 gauge reading: \_\_\_\_\_

Signed (Engineer): \_\_\_\_\_

## SUPPORT

Contact your supplier, or the manufacturer:

AIRBENCH LTD

6b COMMERCE WAY, COLCHESTER, ESSEX, CO2 8HR, UK

Tel: 01206 791191 Fax: 01206 791091 Web: [www.airbench.com](http://www.airbench.com) Email: [sales@airbench.com](mailto:sales@airbench.com)

## MAINTENANCE RECORD / LOGBOOK

[illegible]

---

Business Name:	AirBench Ltd 6b Commerce Way, Colchester, Essex. CO2 8HR
Responsible Person:	Simon Cook
Description:	Mist Filter Unit known as “OMF”

## DECLARATION OF CONFORMITY

BY

AIRBENCH LIMITED

### Relevant Directives

EMC Directive 2014/30/EU (when connected to standard mains sinusoidal supply).

Machinery Directive 2006/42/EC

Low voltage Directive 2014/35/EU

- EN-60204-1:2018 (Safety of machinery, electrical equipment of machines, general requirements).
- EN-60335-2-80 (Safety requirements for electric fans and regulators).

We; AIRBENCH Limited, declare that “OMF” when supplied as self contained equipment complies with the directives detailed above and therefore comply with requirements of the Low Voltage Directive.



Simon Cook / Managing Director / 5th March 2021

Data shown is for standard models. Check the Commissioning Certificate for details specific to your unit.