


# COUNTY-S EVO




## COUNTY-S EVO

County-s evo is a motorized counting machine for taped SMD component counting. It can operate in two different ways:

**1) TOTALIZER:** components are counted from a zero reference, tape feed is motorized and the counter automatically stops at the tape end, to prevent loss of the total

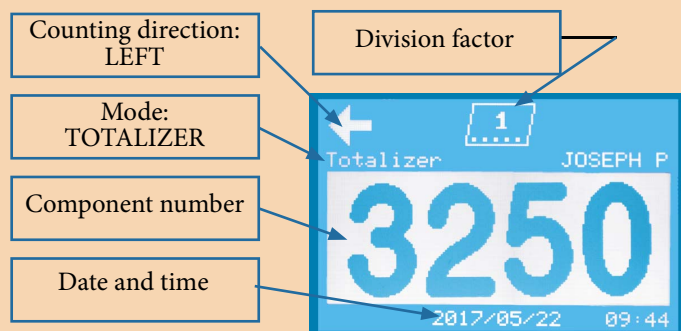

**2) PRESET MODE:** the desired component number is keyed on the keyboard and the counter automatically stops when it reaches the corresponding component

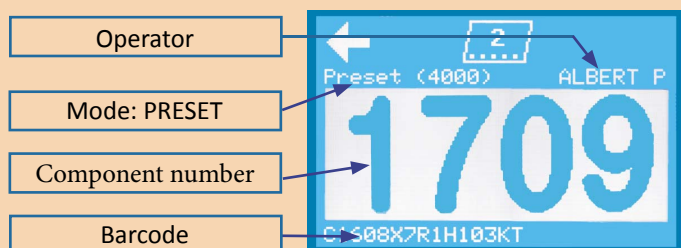

## EMPTY POCKET CHECK

Checks the presence of the component  
Programmable Stop: Never - 1 - 2  
It only works on black plastic tapes



EPC disabled




EPC enabled



EPC counting

## TECHNICAL FEATURES

Counting: max 999999 pcs, 6 digits 22mm height  
Maximum counting speed: 220pcs/sec (1 piece for hole)  
Pitch (holes for component): from 1/4 - 1/3 - 1/2 - 1 - 2 - ... - 19  
Maximum tape height: 56mm  
Maximum reel diameter: 400mm (standard configuration)  
650mm (with **8301.150** support)  
Display: blue LCD with led backlight 160x104 pixel  
visible area: 74x46mm  
Adjustable speed control  
Step by step mode (1 component at a time)  
Empty pocket check (optional)  
Barcode reader input  
Serial connection for label printer or PC  
Selection of the operator (10 operators can be memorized with 8 alphanumerical chars everyone)  
Internal clock (1 week backup)  
Datalogger that stores the last 500 counting data  
Memory storage for subtotals  
2 side handles for easy transport.  
Dimensions: 525 x 340 x 250(H) mm  
Weight: 9,5 Kg

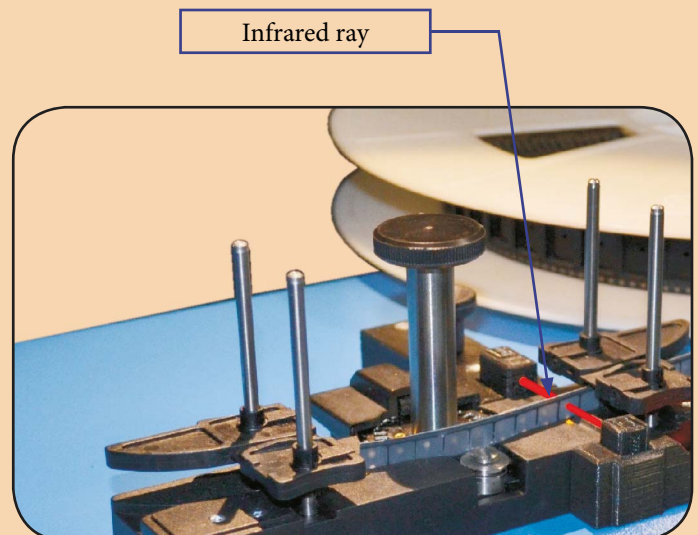


## COUNTY-S EVO

County-S EVO control keyboard



- 8301.131** County-S EVO 230V/50-60Hz
- 8301.133** County-S EVO 230V/50-60Hz with Empty Pocket Check
- 8301.141** County-S EVO 115V/50-60Hz
- 8301.143** County-S EVO 115V/50-60Hz with Empty Pocket Check
- 8301.350** ISO9000 Traceable® Certificate
- 8301.150** Support for reels > 400mm diameter
- 8301.021** Empty Reel, aluminium made, 360mm diameter
- 8301.155** Barcode with coiled cord
- 8301.095** Direct thermal label printer
- 8301.096** 57x51mm, 1360 labels/roll

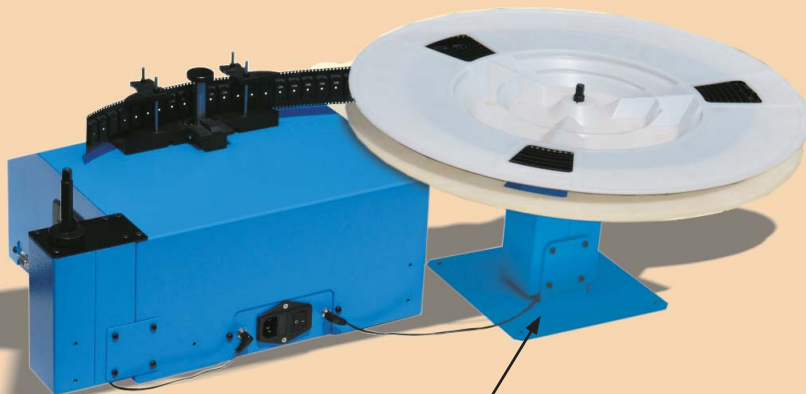

Support for reels with diameter > 400mm (cod. 8301.150)

## PRINTER

For County EVO and County-S EVO

Direct thermal label printer built for ease-of-use and durability, ac adaptor 110-230Vac and data cable included.

Maximum print width is 104mm however the print is optimized for 57x51mm labels

- 8301.095** Direct thermal label printer
- 8301.096** 57x51mm, 1360 labels/roll



PRINTER

## BARCODE for County EVO and County-S EVO

It's small, lightweight and ergonomic design, coiled cable included, a wider than usual scan angle provides the ability to read a longer bar code from a shorter distance, IP42 protection.

The barcode is connected and powered via a single cable, without the hassle of two separate cables1

- 8301.155** Barcode with coiled cord

