COUNTY-S EVO


County-S EVO control keyboard



8301.131	County-S EVO 230V/50-60Hz
8301.133	County-S EVO 230V/50-60Hz with Empty Pocket Check
8301.141	County-S EVO 115V/50-60Hz
8301.143	County-S EVO 115V/50-60Hz with Empty Pocket Check
8301.350	ISO9000 Traceable® Certificate
8301.150	Support for reels > 400mm diameter
8301.021	Empty Reel, aluminium made, 360mm diameter
8301.155	Barcode with coiled cord
8301.095	Direct thermal label printer
8301.096	57x51mm, 1360 labels/roll

EMPTY REEL aluminium made diameter 360mm (cod. **8301.021**)



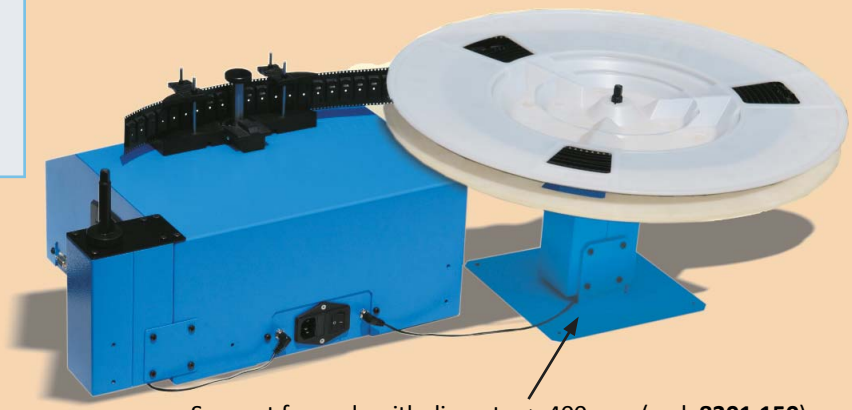

Support for reels with diameter > 400mm (cod. **8301.150**)

PRINTER

For County EVO and County-S EVO

Direct thermal label printer built for ease-of-use and durability, ac adaptor 110-230Vac and data cable included.

Maximum print width is 104mm however the print is optimized for 57x51mm labels

8301.095	Direct thermal label printer
8301.096	57x51mm, 1360 labels/roll



PRINTER

BARCODE for County EVO and County-S EVO

It's small, lightweight and ergonomic design, coiled cable included, a wider than usual scan angle provides the ability to read a longer bar code from a shorter distance, IP42 protection.

The barcode is connected and powered via a single cable, without the hassle of two separate cables1

8301.155	Barcode with coiled cord

