

SMD COMPONENT COUNTING

The County adaptor for counting taped SMD components is an optional accessory (8301.018), allows the counting of the SMD components through the holes of the support tape.


SMD Reels Ø 180 mm

Extraction hole

The worktop 8301.027 includes two easy insertions pins with adjustable clutch. Furthermore, at least one handle (8301.030) is required for rewinding the reels. The aluminum empty reel (8301.021) is an available optional to speed up the counting operations and subsequent rewinding of the SMD components

AXIAL AND RADIAL PTH COUNTING

Before counting it is necessary to select the lead component number by setting the divider. For bandolier counting the 8301.023 support is available, with an easily inserted 8301.025 handle (see figure on right)

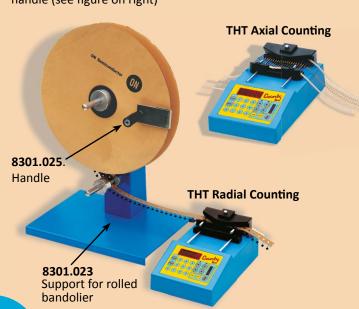

Divider from: 1/4 - 1/3 - 1/2 - 1 - 2 -...- 19

TOTALIZER mode counting

PRESET mode counting (with audible allarm when the desired component number is reached)

Calibration test and self diagnostic procedure Last counting value ane condition memory

Model 8301.088 with rechargable battery, Barcode reader input, output for printer/PC, Watch, Datalogger with 500 counting record

Maximun countig value: 999999 comp.

Minimun lead diameter (THT component): 0,4 mm Axial component bandolier width (THT): 55 ÷ 110 mm Radial component bandolier width (THT): max 18 mm Maximun component diameter (THT): 14 mm

Maximun tape height (SMD component): 56 mm

Display: 4 digits 13 mm height

Dimensions: 240 x 130 x 110 mm - Weight 1,8 kg

8301.087 County EVO 100÷240V/50-60Hz

8301.088 County EVO 100÷240V/50-60Hz with accumulator, barcode input, printer output, watch

8301.350 ISO9000 traceable certificate

Accessories for counting of THT taped component

8301.023 Complete support for rolled bandolier

8301.025 THT Bandolier handle

Accessories for counting of SMD taped component

8301.018 SMD Adaptor

8301.027 Worktop with 2 pins for reel

8301.030 SMD Reel handle

8301.021 Empty Reel aluminium made for County-EVO

Barcode e Printer

8301.155 Barcode with coiled cord (1)

8301.095 Direct thermal label printer (1)

8301.096 57x51mm 1360 labels/roll (1)

(1) photos and specifications at page 4