


COUNTY-S EVO




COUNTY-S EVO

County-s evo is a motorized counting machine for taped SMD component counting. It can operate in two different ways:

1) TOTALIZER: components are counted from a zero reference, tape feed is motorized and the counter automatically stops at the tape end, to prevent loss of the total

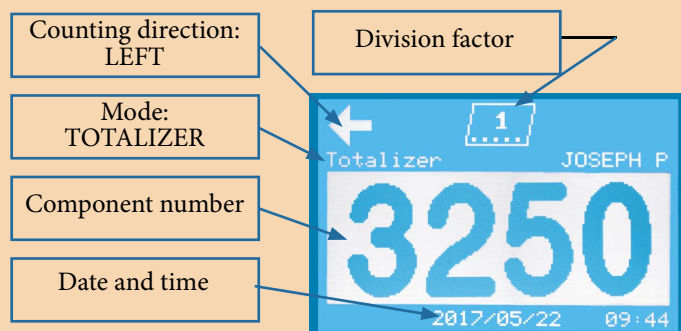

2) PRESET MODE: the desired component number is keyed on the keyboard and the counter automatically stops when it reaches the corresponding component

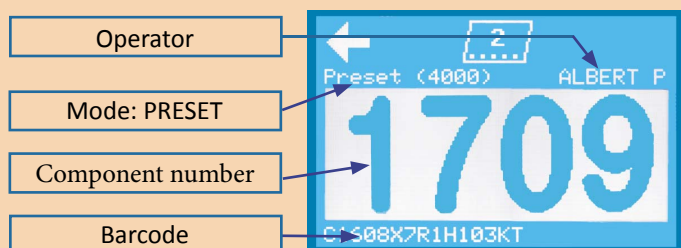

EMPTY POCKET CHECK

Checks the presence of the component
Programmable Stop: Never - 1 - 2
It only works on black plastic tapes



EPC disabled




EPC enabled



EPC counting

TECHNICAL FEATURES

Counting: max 999999 pcs, 6 digits 22mm height
Maximum counting speed: 220pcs/sec (1 piece for hole)
Pitch (holes for component): from 1/4 - 1/3 - 1/2 - 1 - 2 - ... - 19
Maximum tape height: 56mm
Maximum reel diameter: 400mm (standard configuration)
650mm (with **8301.150** support)
Display: blue LCD with led backlight 160x104 pixel
visible area: 74x46mm
Adjustable speed control
Step by step mode (1 component at a time)
Empty pocket check (optional)
Barcode reader input
Serial connection for label printer or PC
Selection of the operator (10 operators can be memorized with 8 alphanumerical chars everyone)
Internal clock (1 week backup)
Datalogger that stores the last 500 counting data
Memory storage for subtotals
2 side handles for easy transport.
Dimensions: 525 x 340 x 250(H) mm
Weight: 9,5 Kg

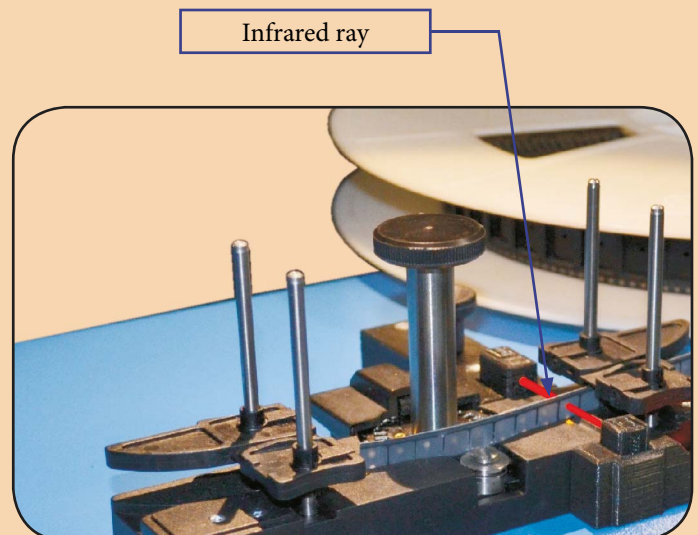


COUNTY-S EVO

County-S EVO control keyboard



- 8301.131** County-S EVO 230V/50-60Hz
- 8301.133** County-S EVO 230V/50-60Hz with Empty Pocket Check
- 8301.141** County-S EVO 115V/50-60Hz
- 8301.143** County-S EVO 115V/50-60Hz with Empty Pocket Check
- 8301.350** ISO9000 Traceable® Certificate
- 8301.150** Support for reels > 400mm diameter
- 8301.021** Empty Reel, aluminium made, 360mm diameter
- 8301.155** Barcode with coiled cord
- 8301.095** Direct thermal label printer
- 8301.096** 57x51mm, 1360 labels/roll

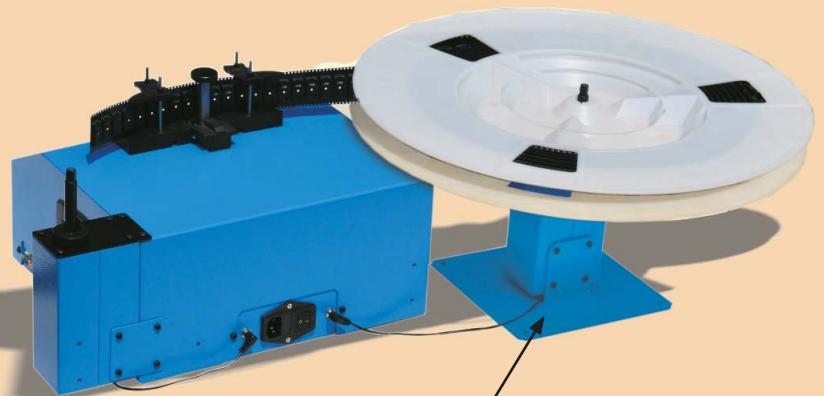

Support for reels with diameter > 400mm (cod. 8301.150)

PRINTER

For County EVO and County-S EVO

Direct thermal label printer built for ease-of-use and durability, ac adaptor 110-230Vac and data cable included.

Maximum print width is 104mm however the print is optimized for 57x51mm labels

- 8301.095** Direct thermal label printer
- 8301.096** 57x51mm, 1360 labels/roll



PRINTER

BARCODE for County EVO and County-S EVO

It's small, lightweight and ergonomic design, coiled cable included, a wider than usual scan angle provides the ability to read a longer bar code from a shorter distance, IP42 protection.

The barcode is connected and powered via a single cable, without the hassle of two separate cables1

- 8301.155** Barcode with coiled cord

