




COBAelite® ESD

Bubble surfaced mat to tackle fatigue in ESD sensitive areas



- Static-dissipative anti-fatigue mat for comfort and safety.
- Conductive buried layer neutralises static charge, protecting components.
- Comfortable bubbled surface promotes subtle movement further reducing fatigue.
- Grounded via a 10 mm male stud fitted to the mat.
- Meets or exceeds IEC61340-5-1 resistance requirements.
- Resistance to a groundable point (Rgp): $2.4 \times 10^6 \Omega$

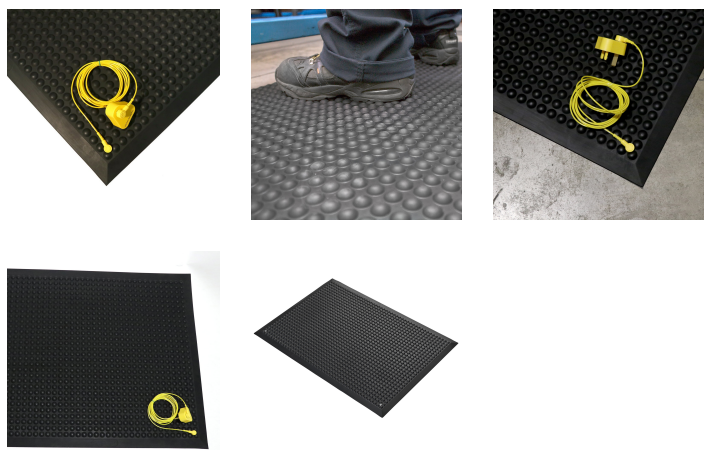

Parts

Part Number	Size	Colour	Weight (kg)
SE010001ESD	0.6 m x 0.9 m	Black	2
SE010003ESD	0.9 m x 1.2 m	Black	4.5
SE010010ESD	Special size	Black	

Technical Specifications

Material	PU
Surface Finish	Bubble
Product Height	14 mm
Product Weight	3 kg $\pm$ 3%
Min. Operating Temperature	-40°C
Max. Operating Temperature	+80°C
Resistance to Chemicals	PU offers limited resistance to chemicals and oils
Environmental Resistance	Suitable for dry indoor environments
UV Resistance	Yes

Accessories	ESD accessories available
Fire Tested to	BS EN 13501-1 Class Efl - s1
COO (Country of Origin)	DE

Additional Information



Installation Guide



COBAelite ESD Test IEC 61340.jpeg



COBAelite BS EN 13501 Fire Test



COBAelite EN ISO 9239 Fire Test



COBAelite EN ISO 11925 Fire Test

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email sales@cobaeurope.com

www.cobaeurope.com