



# SUPERCUT-LN5

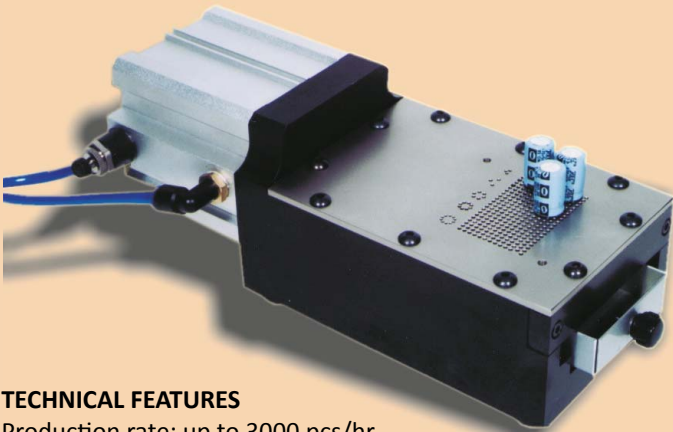

## TECHNICAL FEATURES

Production rate: up to 3000 pcs/hr  
 Dimensions (7915.041): 100 x 250 x 93 mm  
 Dimensions (7915.041L): 100 x 300 x 93 mm  
 Supply: 6 ATM  
 Weight: 4,5/6 Kg




	L	d
Min. (mm)		0.3
Max. (mm)		1.3
Fix.	3.2	

- 7915.041** SUPERCUT/LN5 with foot pedal control
- 7915.041L** SUPERCUT/LN5L long model with foot pedal control
- 340.114** Optional additional plate for SUPERCUT/LN5 (max 3mm)
- 340.214** Optional additional plate for SUPERCUT/LN5L (max 3mm)

This pneumatic machine is designed to cut/trim almost every type radial lead components. The guillotine cutting system, with zero clearance between the plates, guarantees a sharp and precise cut without burrs or damage to the leads. It is possible to cut many components at the same time without any risk of wear of the blades.



The machine can be supplied with special cutting jig. An additional optional plate (thickness to be specified, max 3mm) can be supplied to increase the cutting height of the leads. Two models available, the first with a cutting area 53x43mm, the second with a cutting area 53x93mm.

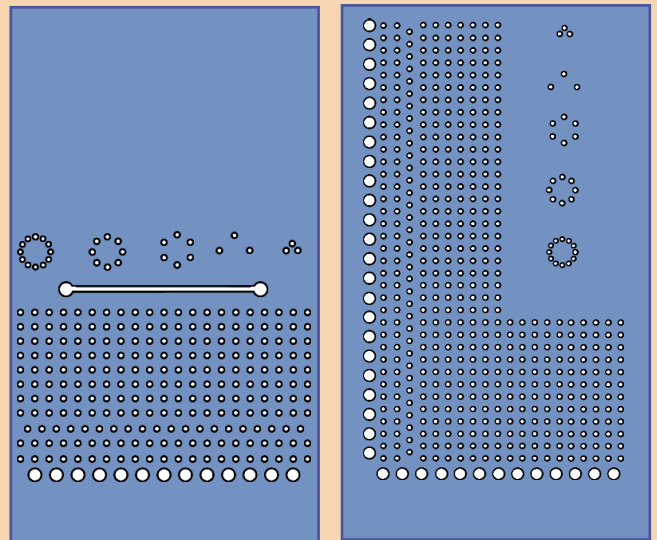

Standard plate hole layout SUPERCUT/LN5

Standard plate hole layout SUPERCUT/LN5L

# SUPERFORM-V

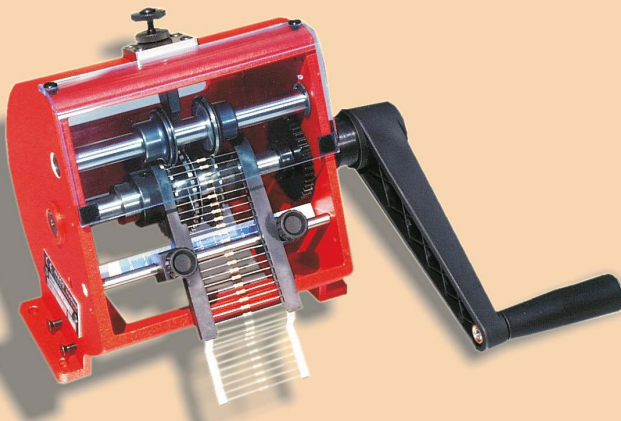

	P	d		A		D
	fix.	min.	max.	min.	max.	max.
<b>7915.101 B standard</b>	2.54	0.5	0.8	2	6	3
<b>7915.101 C</b>	3.8	0.5	0.8	2.5	5	5
<b>7915.101 D</b>	5.08	0.5	0.8	3	7	8
<b>7915.101 E</b>	7.62	0.5	0.8	4	7	10
<b>7915.091 A</b>	3.8	0.8	1.3	4	9	5
<b>7915.091 B</b>	5.08	0.8	1.3	5	9	8
<b>7915.091 C</b>	7.62	0.8	1.3	6	9	10

SUPERFORM/V is a machine made for cutting and bending axial taped components for vertical mounting.

Production rate up to 40000 pcs/hr

- 7915.030** Motor Unit for SUPERFORM, 230V - 50/60Hz
- 7915.031** Motor Unit for SUPERFORM, 115V - 50/60Hz
- 7915.182** Feeder CS30 for loose axial components
- 7915.185** Tape Reel Holder arm BR6